


OPICO VARI-TILTH QUICK REFERENCE




Points for Standard Vari-Tilth

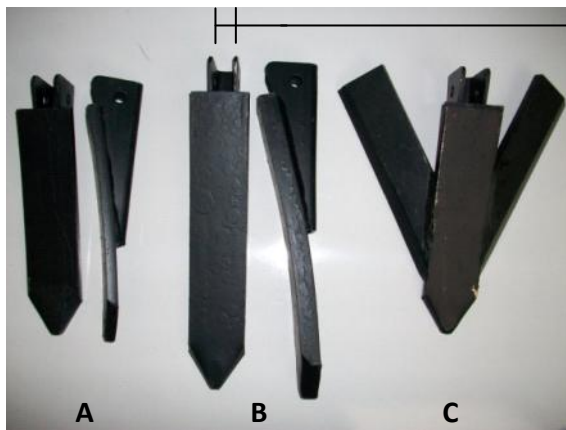

Standard Vari-Tilth
Leg = 20mm thick

63990446 = LEG & SHIN

63990354 = WELD ON SHIN



21.5 mm to fit
20mm Thick 63990446 Leg

A = 63990245 Standard Point 6cm Wide 12mm thick

B = 63990248 Heavy Duty Point 6cm Wide 20mm thick

C = 63990247 Winged Point 27.5cm 12mm thick




1 = 63990121 12.9 SOCKET CAP SHEAR BOLT FOR 63990446 LEG

2 = 63990119 10.9 (STANDARD) SHEAR BOLT FOR 63990446 LEG

3 = 63990120 10.9 (STANDARD) SHEAR BOLT FOR 63991553 LEG

4 = LEG PIVOT BOLTS ARE

M16 X 80 8.8 FOR 20MM LEG & M16 X 90 8.8 FOR 27MM LEG

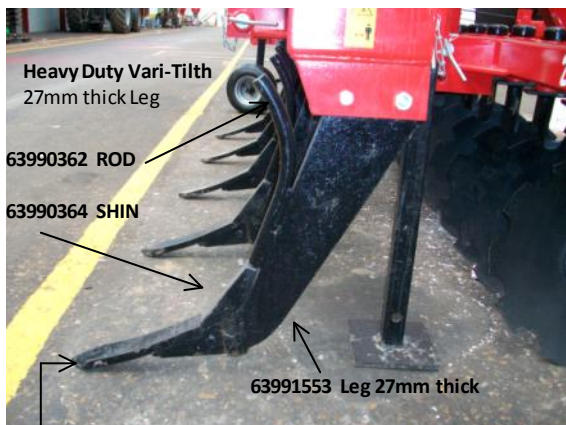



Heavy Duty Vari-Tilth
27mm thick Leg

63990362 ROD

63990364 SHIN

63991553 Leg 27mm thick

Points for Heavy Duty Vari-Tilth

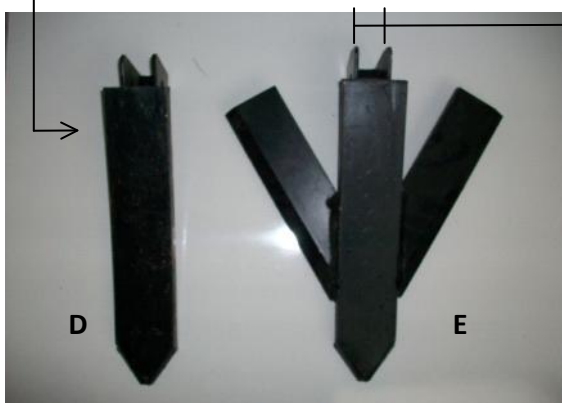

28.5 mm to fit
27mm Thick 63991553 LEG

D = 63990250 Standard Point 6cm Wide 20mm Thick

E = 63990260 Winged Point 27.5cm Wide 20mm Thick